


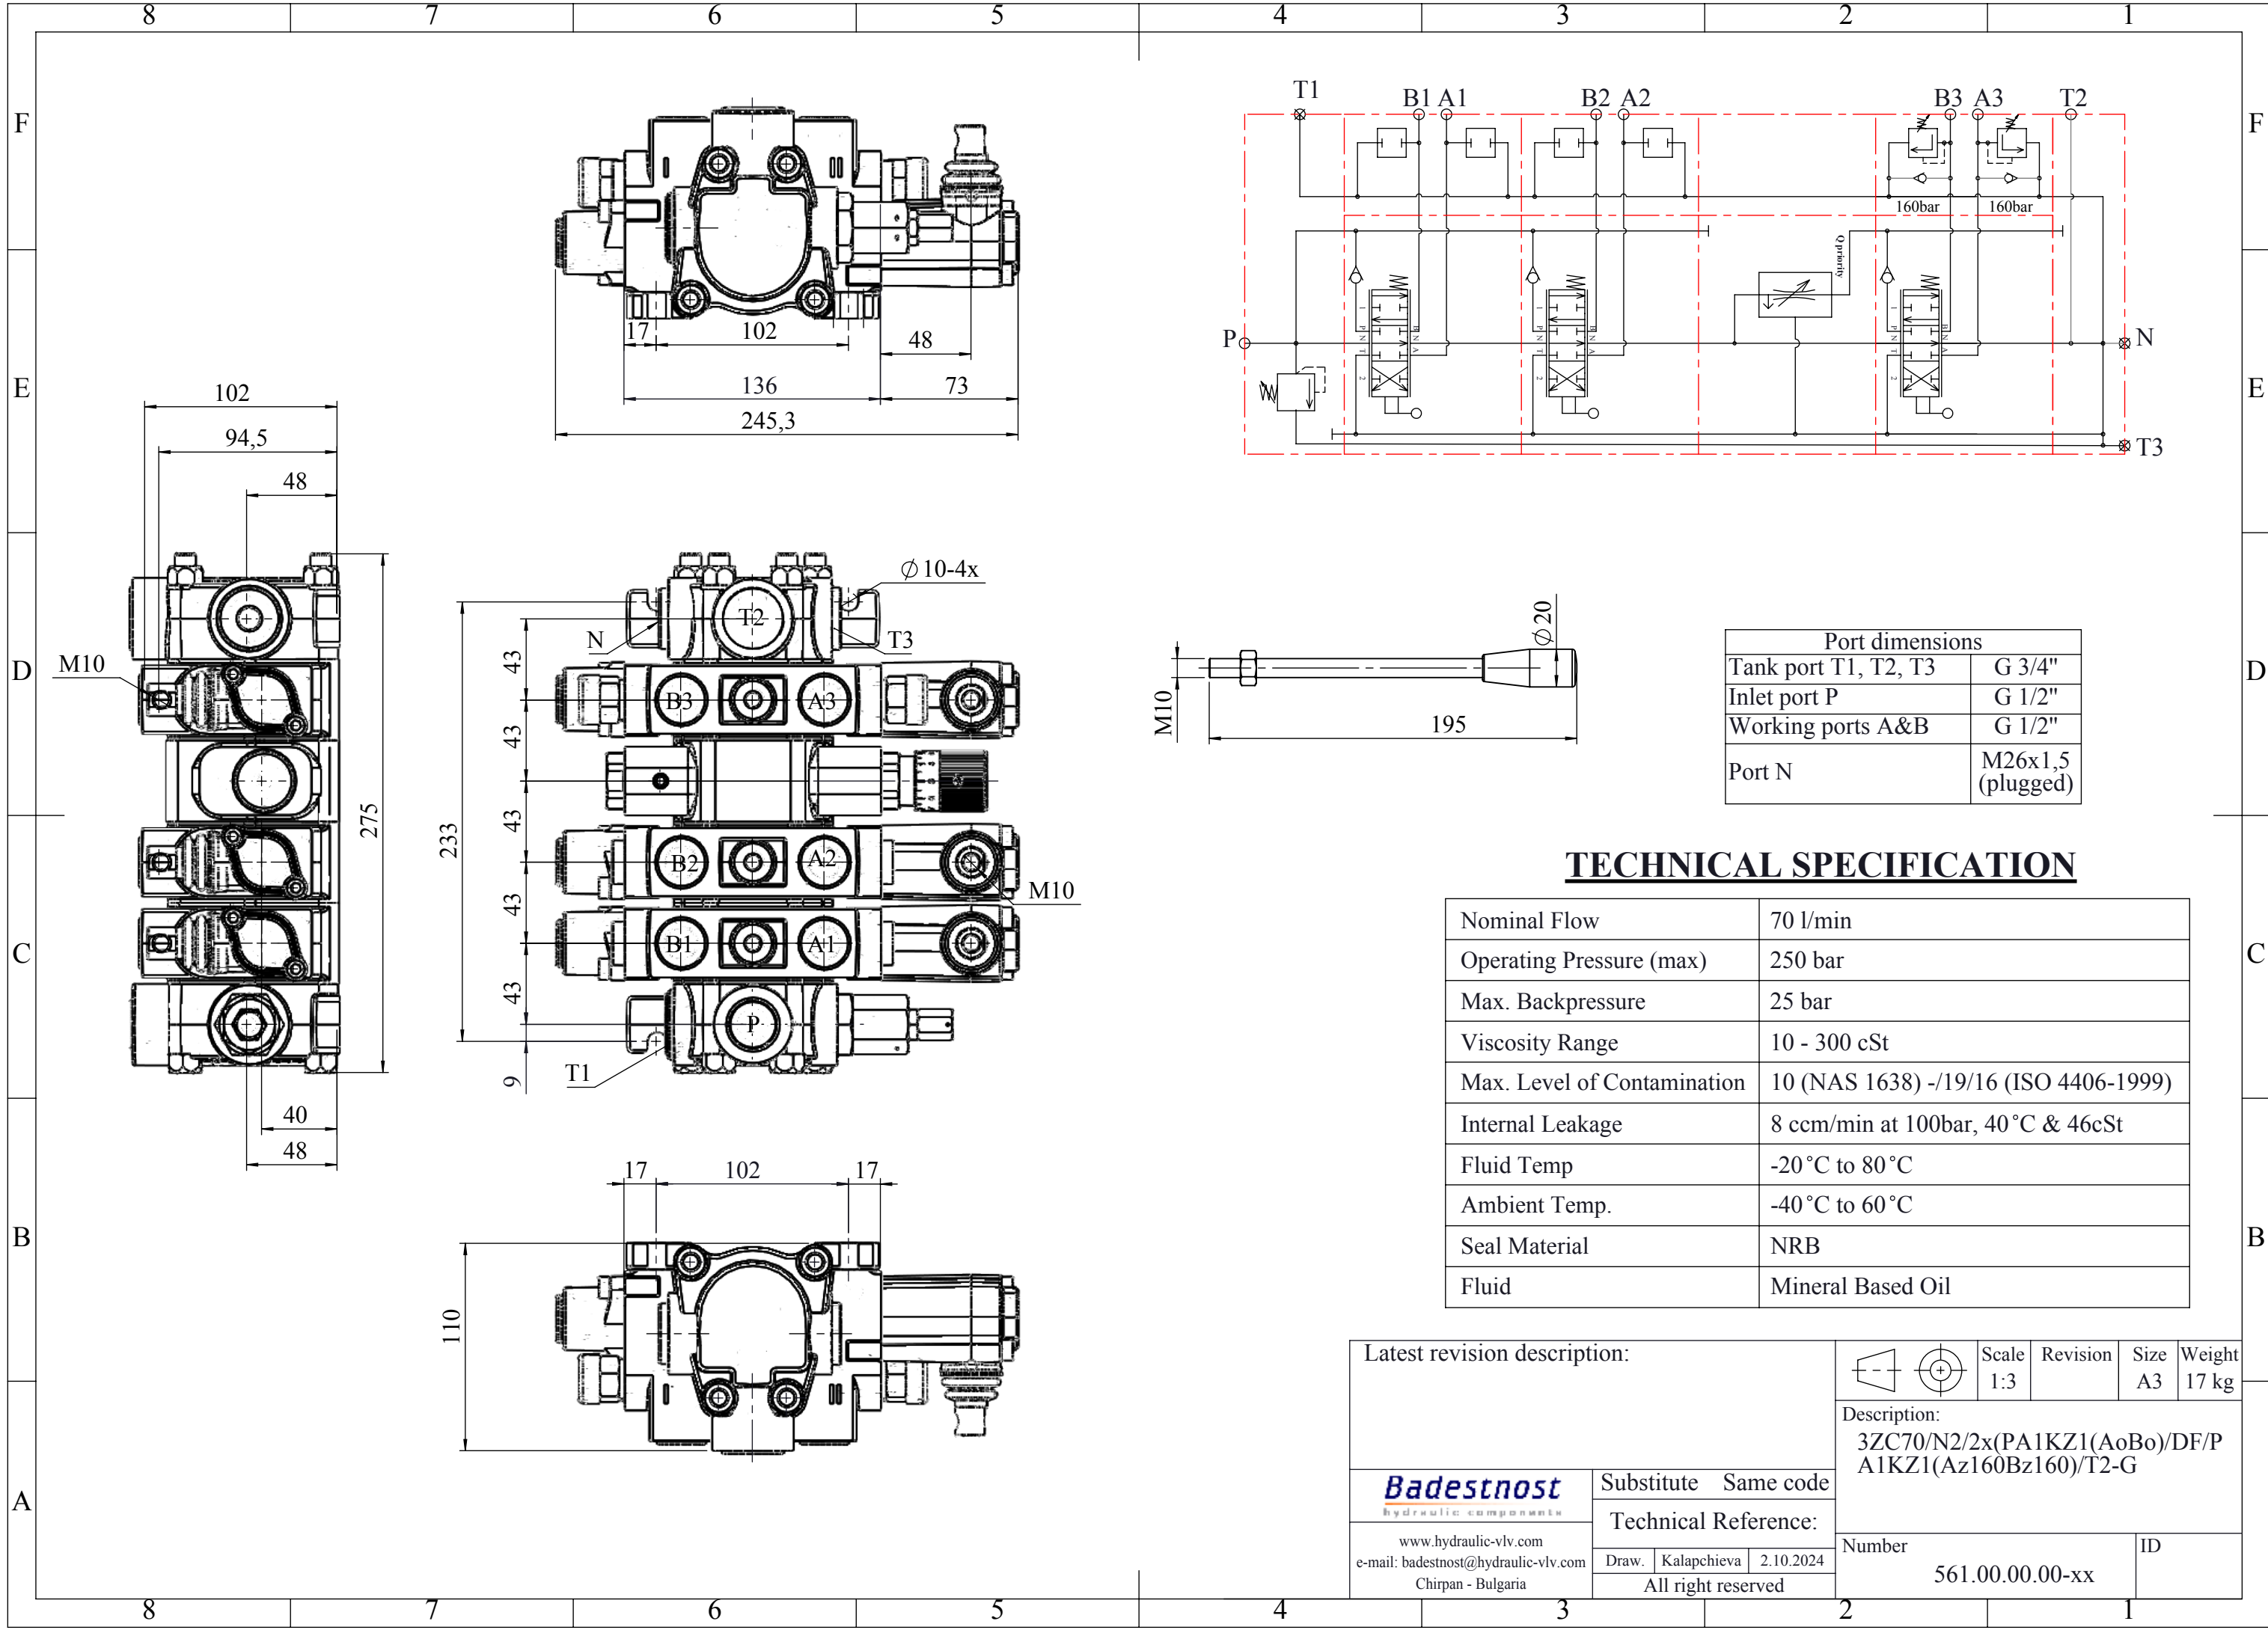

Port dimensions	
Tank port T1, T2, T3	G 3/4"
Inlet port P	G 1/2"
Working ports A&B	G 1/2"
Port N	M26x1,5 (plugged)

TECHNICAL SPECIFICATION

Nominal Flow	70 l/min
Operating Pressure (max)	250 bar
Max. Backpressure	25 bar
Viscosity Range	10 - 300 cSt
Max. Level of Contamination	10 (NAS 1638) -/19/16 (ISO 4406-1999)
Internal Leakage	8 ccm/min at 100bar, 40°C & 46cSt
Fluid Temp	-20°C to 80°C
Ambient Temp.	-40°C to 60°C
Seal Material	NRB
Fluid	Mineral Based Oil

Latest revision description:

	Scale	Revision	Size	Weight
1:3			A3	17 kg

Description:
3ZC70/N2/2x(PA1KZ1(AoBo)/DF/P
A1KZ1(Az160Bz160)/T2-G

Badestnost
hydraulic components

Substitute Same code

Technical Reference:

www.hydraulic-vlv.com
e-mail: badestnost@hydraulic-vlv.com
Chirpan - Bulgaria

Draw.	Kalapchieva	2.10.2024
All right reserved		

Number	561.00.00.00-xx
--------	-----------------

ID