


Designed as a middle section of multiple gear pumps group 332.

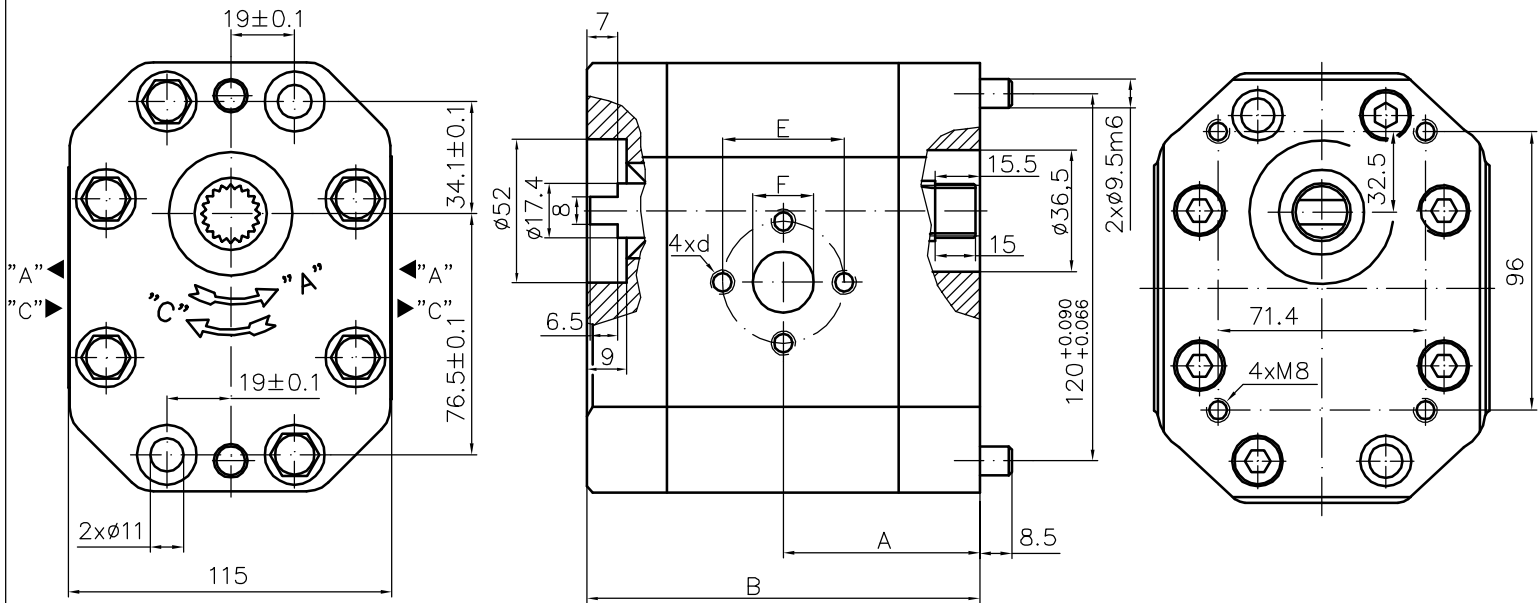

Type	Displacement cm ³ /rev	Flow		Pressure P _{nom} bar	max Speed n rpm	Dimension								
		at 1500 rpm l/min	at max rpm l/min			Inlet		Outlet						
						A mm	B mm	E	d	F	E	d	F	
30A(C)20X325H	20	28,2	56,4	250	3000	58,5	117,1	40	M8	19	40	M8	19	
30A(C)22,2X325H	22,5	31,7	63,5	250	3000	60,0	120,1							
30A(C)25X325H	25	35,3	70,5	250	3000	60,8	121,5							
30A(C)28X325H	28	39,5	79,0	250	3000	62,5	125,1							
30A(C)32X325	32	45,1	75,2	250	2500	64,2	128,5							
30A(C)32X325H	32	45,1	90,2	250	3000	68,8	137,7	51	M10	27	40	M8	19	
30A(C)36X325	36	50,8	84,6	250	2500	65,7	131,6							
30A(C)36X325H	36	51,3	95,8	250	2800	70,5	140,9							
30A(C)42X325	42	59,9	91,8	230	2300	68,5	137,2							
30A(C)42X325H	42	59,9	99,8	230	2500	73,2	146,5							
30A(C)46X325H	46	65,6	100,5	230	2300	75,1	150,2	51	M10	27	40	M8	19	
30A(C)50X325H	50	71,3	99,8	200	2100	76,9	153,8							
30A(C)55X325H	55	78,4	91,4	200	1750	79,1	158,3							
30A(C)60X325H	60	85,5	99,8	180	1750	81,4	162,8							