




**Hidro
Pnevmo
Tehnika**





3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228
Fax : +359 431/ 62 019
e-mail : info@hpt-bg.com
www.hpt-bg.com

VALVE BLOCK





BPC5/



All performances and calibration are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50 °C
Temperature range: -20 °C...+80 °C.
Filtration absolute: 20 µm

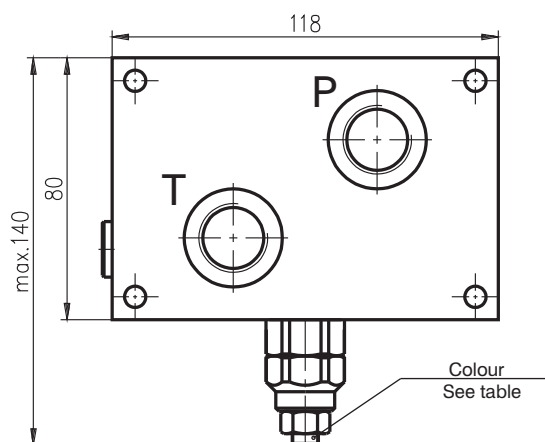

Code	Adjustments
A	Leakproof hex. socket screw
B	Handknob and locknut

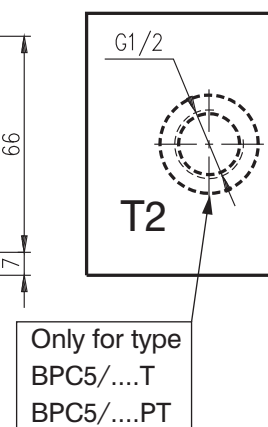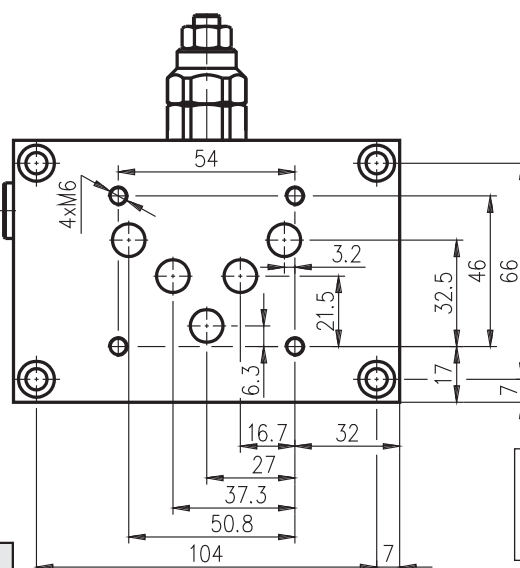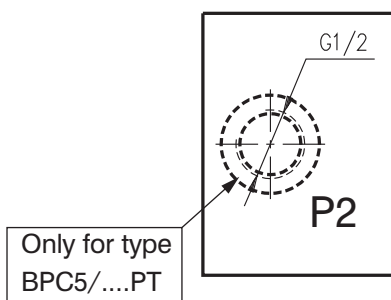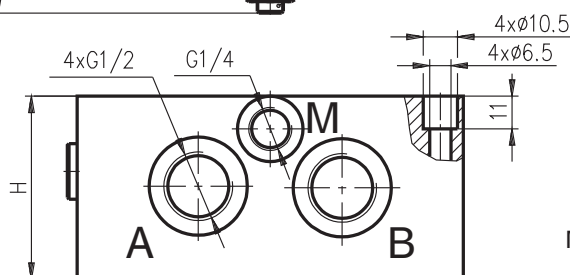

Pressure range			
Code	Standard setting bar (Q=5l/min)	Adj. pressure range bar	Colour
10	80	10...100	White
25	180	30...250	Yellow
35	250	70...350	Black

Type	P _{max.}	Q _{max.}	H
	bar	L/min	mm
BPC5/.. ..	350	40	58
BPC5/.. .. T	350	40	58
BPC5/.. .. PT	350	40	68

ORDERING CODE

BPC5/ 25 A T

Type	Pressure range code: 10,25,35	Adjustments code: A,B	Scheme code: T,PT,Omit
------	--------------------------------------	------------------------------	-------------------------------